


FIG. 112 DETAIL USING BRICK SLIPS

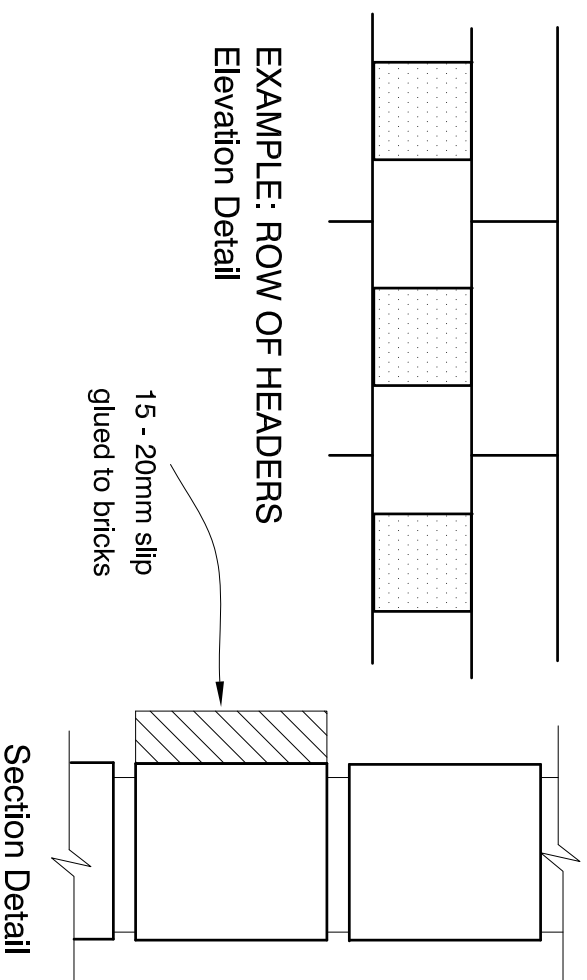

NOTES;

1. 15 - 20mm brick slips may be glued directly to the surface of smooth or textured bricks to form any pattern.
2. The substrate can be fibre-cement, plaster, concrete, etc.
3. Soldier courses, arches, bulls-eyes and random patterns can be achieved using a contrasting brick.
4. Use an appropriate adhesive. Consult adhesive suppliers.
5. This method of construction requires a low level of skill and can be added once the home is completed.
6. Cut brick slips using a diamond saw. Remove dust before fixing.